Beta 2

96631470 <BETA 2 LED3800-840 HFIX E3D 300X1200

Beta 2

A rectangular ceiling recessed LED luminaire with a 14mm profile. DALI dimmable LED driver with 3 hour, Self/DALI Addressable test, emergency lighting circuit. Class I electrical, IP40_IP20, IK06. Body: sheet steel, white (close to RAL9016). Diffuser: micro prisms. Complete with 4000K LED.

UGR < 19 and L65 < 3000 cd/m² as per EN 12464

Dimensions: 1196 x 296 x 14 mm
Luminaire input power: 36 W
Luminaire luminous flux: 3800 lm
Luminaire efficacy: 106 lm/W
Weight: 5.5 kg

TLG_BET2_F_MRER.jpg

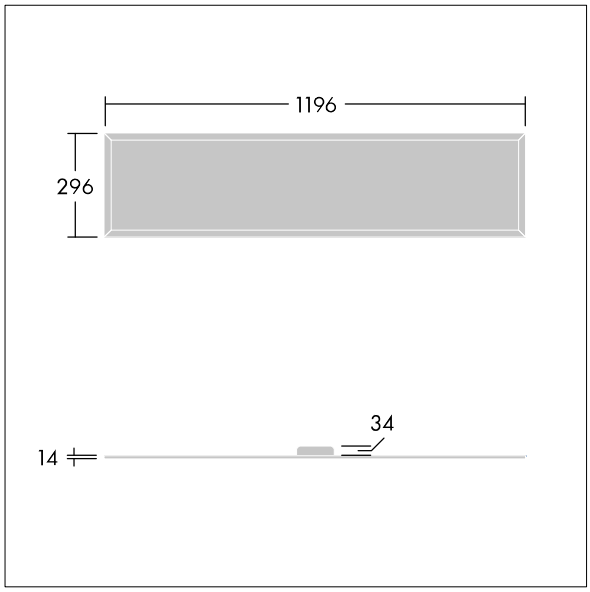

TLG_BET2_M_1196x296.wmf

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting