THORN

96012860 <PETRELUX P9 2x58w T26 HF E3

ATEX Category 2 Certificated linear emergency luminaire

Zone 1 (ATEX Cat 2) fluorescent luminaire, designed and constructed to EEx ed 'increased safety' concept, for 2 x 58 Light Source: 1 x T26 / 58W lamps with emergency lighting function. Integral high frequency electronic ballast, emergency lighting control module and battery to provide 3 hour duration emergency lighting. Body, constructed from aluminium alloy extrusion with AA25 anodised finish, incorportes linear retention slot for T8 quick fit bolts (supplied). Body end caps are moulded Petrelux Green polycarbonate and are bonded and sealed to the body. Enclosure is clear UV stabilised polycarbonate with linear prisms. Enclosure is held to body by internal cams operated by a single hexagonal key. IP65. Certification code EEx ed 11C T4.

Dimensions: 1675 x 192 x 142 mm

Luminaire input power: 5 W

Weight: 12 kg

TLG_PTLX_F_901.jpg

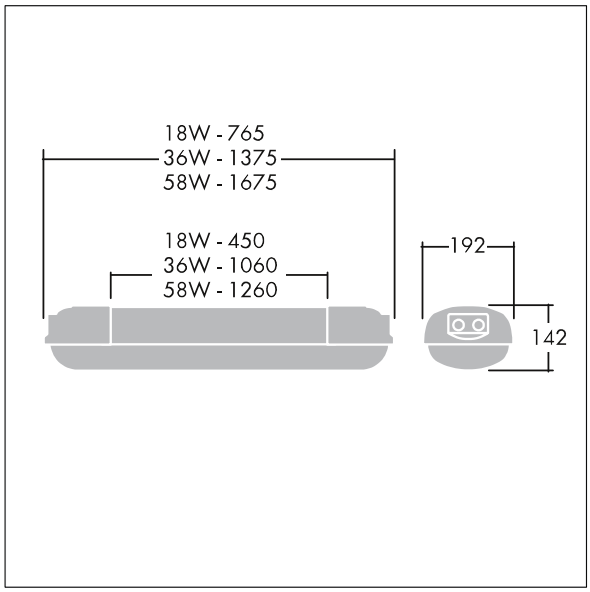

TLG_PTLX_M_LD1.wmf

All values marked with an * are rated values. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting