

Graffiti

THORN

96108722 GRAFFITI 2800-940HE SWI 3GU WFL WH 12X

Graffiti


LED spotlight for 3 phase track installations with wide flood light distribution and stabilized color temperature. Electronic, switchable luminaire. Class I electrical, IP20. Body: die-cast aluminium white micro-textured paint. Reflector: PC sputtered. Spotlight rotatable through 337° and pivotable through 90°. Complete with 4000K LED, maximum efficiency

This article is bulk packed and contains twelve pieces. The article code has to be ordered as a multiple of twelve (12/24/36/48/60...). All the data on the datasheet refer to a single article.

Dimensions: Ø95 x 205 mm
Luminaire input power: 21 W
Luminaire luminous flux: 2900 lm
Luminaire efficacy: 138 lm/W
Weight: 0.71 kg



TLG_GRAF_F_3GU_WH_ON.jpg

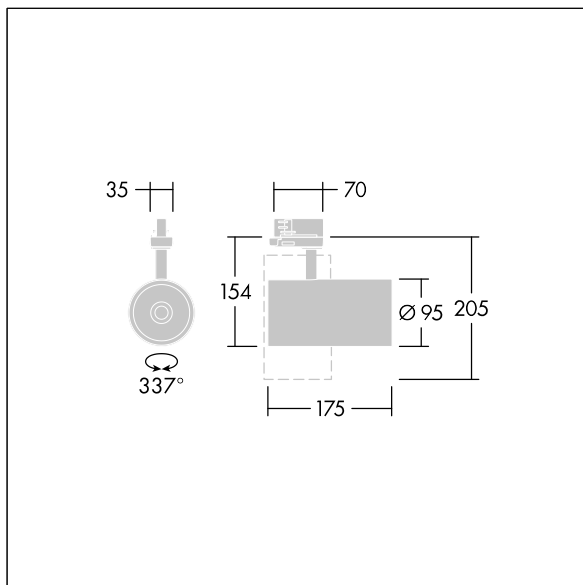

TLG_GRAF_M_3GU.wmf

This product contains a light source of energy efficiency class C.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

Graffiti

96108722 GRAFFITI 2800-940HE SWI 3GU WFL WH 12X

THORN