

# Graffiti

96108758 GRAFFITI 2800-940HE SWI 3GU WFL WH

THORN

## Graffiti


LED spotlight for 3 phase track installations with wide flood light distribution and stabilized color temperature. Electronic, switchable luminaire. Class I electrical, IP20. Body: die-cast aluminium white micro-textured paint. Reflector: PC sputtered. Spotlight rotatable through 337° and pivotable through 90°. Complete with 4000K LED, maximum efficiency

This article is single packed article and can also be ordered bulk packed.

Dimensions: Ø95 x 205 mm  
Luminaire input power: 21 W  
Luminaire luminous flux: 2900 lm  
Luminaire efficacy: 138 lm/W  
Weight: 0.71 kg



TLG\_GRAF\_F\_3GU\_WH\_ON.jpg

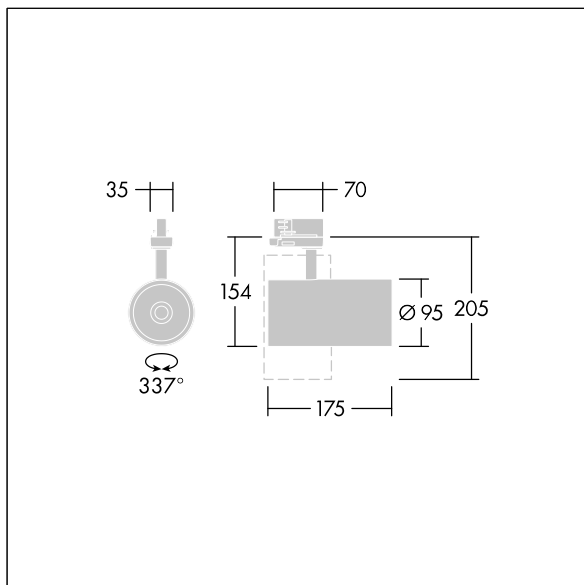

TLG\_GRAF\_M\_3GU.wmf

This product contains a light source of energy efficiency class C.

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at  $\pm 10\%$ . Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting

**Graffiti**

**96108758 GRAFFITI 2800-940HE SWI 3GU WFL WH**

**THORN**