

96108782 GRAFFITI 3600-940HE SWI CONT WFL WH

Graffiti


LED spotlight for CONTUS continuous-row systems with wide flood light distribution and stabilized color temperature. Electronic, switchable luminaire control gear. Class II electrical, IP20. Luminaire with CONTUS adapter for simple, rapid mounting of luminaire to CONTUS continuous-row systems. Body: die-cast aluminium white micro-textured paint. Reflector: PC sputtered. Spotlight rotatable through 337° and pivotable through 90°. Complete with 4000K LED, maximum efficiency

This article is single packed article and can also be ordered bulk packed.

Dimensions: Ø95 x 204 mm
 Luminaire input power: 27 W
 Luminaire luminous flux: 3500 lm
 Luminaire efficacy: 130 lm/W
 Weight: 0.85 kg



TLG_GRAF_F_CONT_WH_ON.jpg

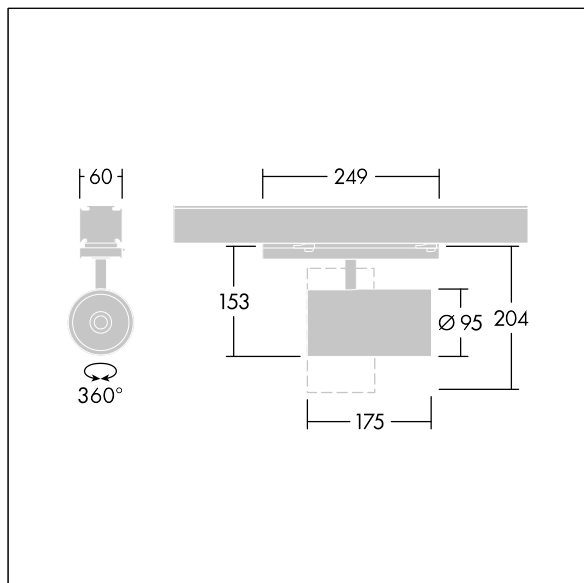

TLG_GRAF_M_CONTUS.wmf

This product contains a light source of energy efficiency class C.

Graffiti

96108782 GRAFFITI 3600-940HE SWI CONT WFL WH

THORN