

# D-CO Bollard

96262098 D-CO LED BOLLARD 1000 30L50 830 CL2 CON

THORN


## D-CO Bollard

A timeless LED bollard. Electronic, fixed output control gear. Class II electrical, IP65. Top and body: aluminium powder coated grey 900. Diffuser: semi-opal anti-UV polycarbonate. Suitable for flange mounting or with root spike (available separately). Complete with 3000K LED

Dimensions:  $\text{Ø}150 \times 1000 \text{ mm}$   
Luminaire input power: 14 W  
Weight: 5.45 kg



TLG\_DCOL\_F\_LEDBOLLARDLIT.jpg

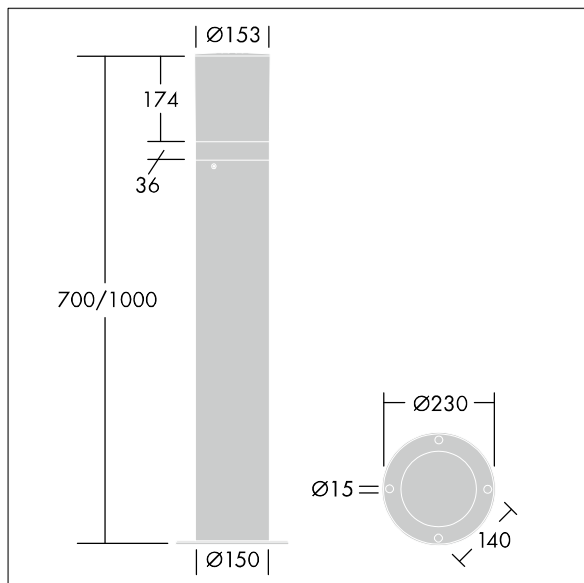

TLG\_DCOB\_M\_BOL.wmf

This product contains a light source of energy efficiency class F.

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at  $\pm 10\%$ . Unless stated otherwise, the values apply to an ambient temperature of  $25^{\circ}\text{C}$ .

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting

## D-CO Bollard

96262098 D-CO LED BOLLARD 1000 30L50 830 CL2 CON

THORN