

D-CO Bollard

96262144 D-CO LED BOLLARD 700 30L50 840 CL2 CON


D-CO Bollard

A timeless LED bollard. Electronic, fixed output control gear. Class II electrical, IP65. Top and body: aluminium powder coated grey 900. Diffuser: semi-opal anti-UV polycarbonate. Suitable for flange mounting or with root spike (available separately). Complete with 4000K LED

Dimensions: Ø150 x 700 mm
 Luminaire input power: 14 W
 Weight: 4.15 kg



TLG_DCOL_F_LEDBOLLARDLIT.jpg

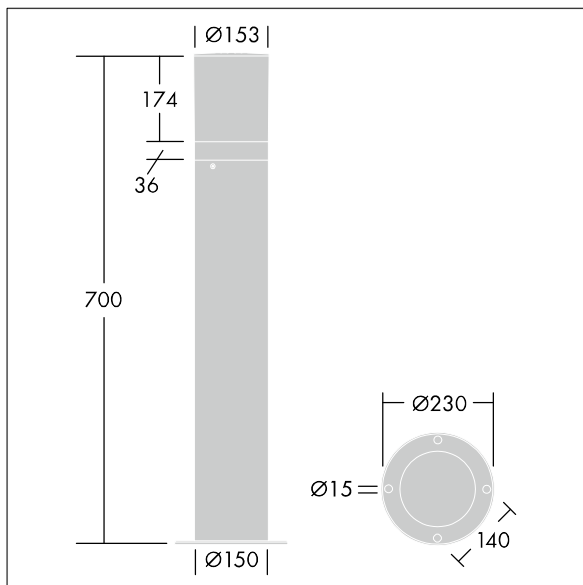

TLG_DCOB_M_BOLN.wmf

This product contains a light source of energy efficiency class F.

D-CO Bollard

96262144 D-CO LED BOLLARD 700 30L50 840 CL2 CON

THORN