

# Vioo

96271766 VIOO 1L120 830 L GRY

THORN


## Vioo

Small LED floodlight for window surround illumination. 1 LED driven at a constant 1.2A. Body: die-cast aluminium (AB47100) with high corrosion resistance, painted Light grey. Front lens: polycarbonate. Class I electrical, IP65, IK10. Pre-wired with 1,5m H05-RNF cable. Complete with 3000K LED

Dimensions: 150 x 90 x 40 mm  
Luminaire input power: 4.7 W  
Luminaire luminous flux: 151 lm  
Luminaire efficacy: 32 lm/W  
Weight: 0.71 kg



TLG\_VIOO\_F\_PDB.jpg

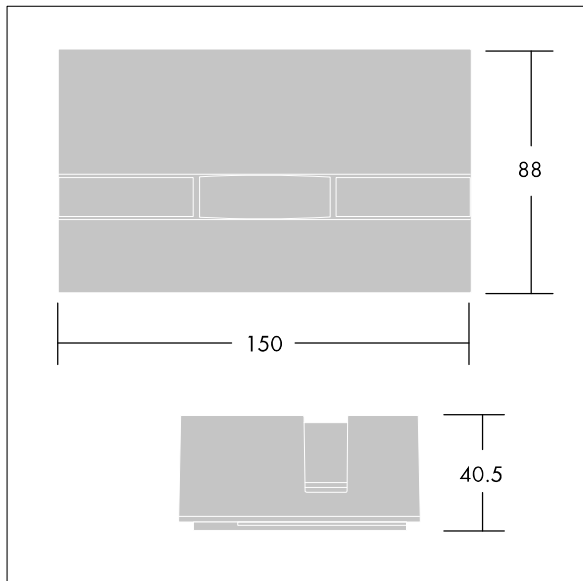

TLG\_VIOO\_M\_LD1.wmf

This product contains a light source of energy efficiency class G.

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at  $\pm 10\%$ . Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting

**Vioo**

**96271766 VIOO 1L120 830 L GRY**

**THORN**