Oxane

96272233 <OXANE S 36L70 IVS EFL 740 CL2

Oxane

A high efficiency LED road lighting luminaire with pedestrian crossing distribution. Body and spigot in die-cast aluminium, powder coated textured light grey (close to RAL 9006), flat toughened glass enclosure. Class II electrical, IP66. Post top (Ø60/76mm x 80mm long spigot, tilted to 5°) or lateral (Ø49/60mm x 120mm long spigot, tilted to 0°) mounting. Complete with 4000K LED

Dimensions: 591 x 286 x 138 mm
Luminaire input power: 77 W
Weight: 6.79 kg
Scx: 0.057 m²

TLG_OXAN_F_POSTTOPPDB_1_14.jpg

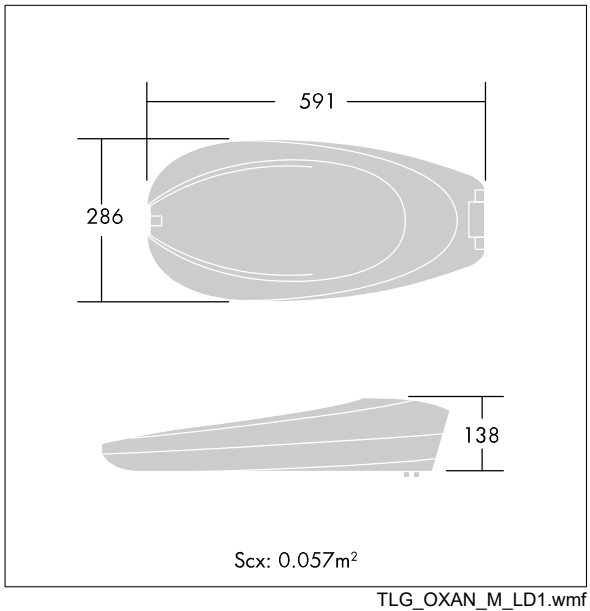

TLG_OXAN_M_LD1.wmf

This product contains a light source of energy efficiency class D.

All values marked with an * are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at ±10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting

Oxane

96272233 <OXANE S 36L70 IVS EFL 740 CL2

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.
© Thorn Lighting