

96665247 TR 36L50 740 NR C90 HFX CL2 FD WS6 ->


Thor

A small size, smart urban LED lantern with 36 LEDs driven at 500mA with narrow road optic and die-cast aluminium EN AC 47100 + CAT dome with anthracite finish (close to RAL7043). Class II electrical, IP66, IK10. Body: Die-cast aluminium (EN AC 47100 + CAT) treated against corrosion, powder coated anthracite (close to RAL7043), bracket: Die-cast aluminium (EN AC-47100 + CAT) treated against corrosion, powder coated anthracite (close to RAL7043). Enclosure: 6mm toughened flat glass. Screws and closing set: stainless steel. Pre-wired with 6m cable. Post top mounting to Ø60mm column, tilt 0°, adjustable from -15° to +10°. Equipped with 50% power reduction circuit, effective 3 hours before and 5 hours after a calculated midnight. It can be deactivated at installation with an easily accessible internal switch. Complete with 4000K LED.

Dimensions: 618 x 459 x 251 mm
 Luminaire input power: 53 W
 Luminaire luminous flux: 6225 lm
 Luminaire efficacy: 117 lm/W
 Weight: 10.6 kg
 Scx: 0.038 m²



TLG_THOR_F_SMTFPD.jpg

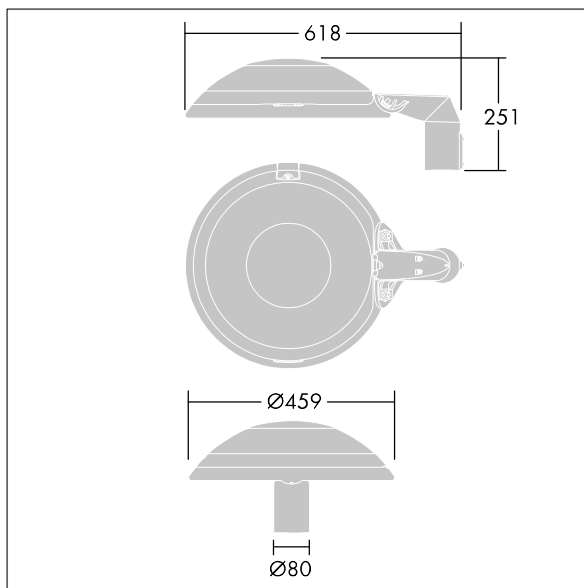

TLG_THOR_M_MTP.wmf

This product contains a light source of energy efficiency class E.

Thor

96665247 TR 36L50 740 NR C90 HFX CL2 FD WS6 ->

THORN