


## Alumet Control Direct

96274735 ALUMET CD 24L25-740 NR-A CL HFX CL1 W4M


### Alumet Control Direct

An architectural lighting column head with 24 LEDs driven at 250mA with a Narrow Road, asymmetric distribution and clear optic, configured for DALI control over additional wires, Top cap: die-cast aluminium. Diffuser: clear UV stabilised polycarbonate treated with anti graffiti varnish. Top cap and column: powder coated textured silver grey (close to RAL 9006), other RAL colours on request. Class I electrical, IK10, IP66. To be mounted on an Alumet column. Surge protection: 10kV single pulse common mode and 8kV multipulse common mode and 6kV multipulse differential mode. If permanent DALI system is connected, 6kV multipulse common and differential mode. Complete with 4000K LED

Dimensions: Ø200 x 1250 mm  
 Luminaire input power: 20 W  
 Luminaire luminous flux: 2308 lm  
 Luminaire efficacy: 115 lm/W  
 Weight: 9.9 kg  
 Scx: 0.079 m<sup>2</sup>

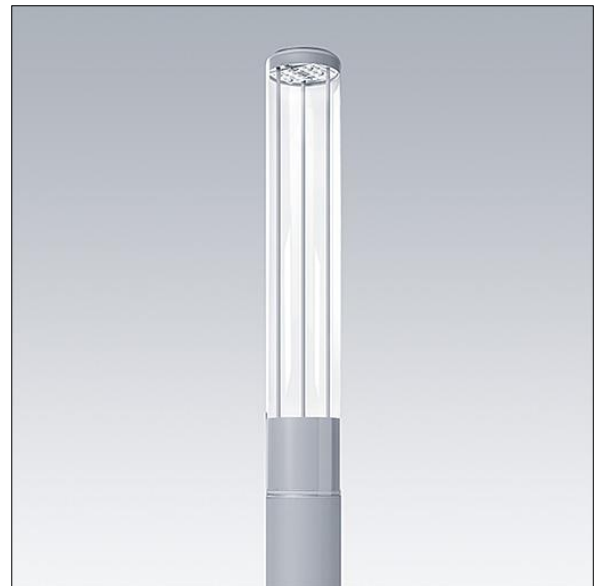

TLG\_ALUM\_F\_DIR\_LED24\_LGY.jpg

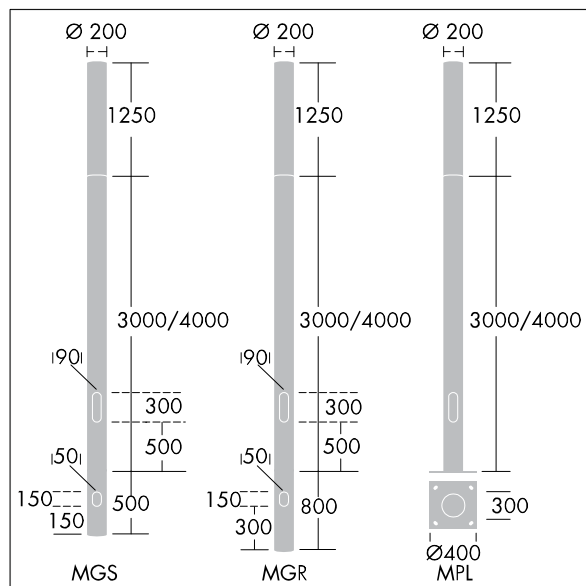

TLG\_ALUM\_M\_2LD1.wmf

This product contains a light source of energy efficiency class D.

# Alumet Control Direct

96274735 ALUMET CD 24L25-740 NR-A CL HFX CL1 W4M

THORN