


Equaline


Equaline frameless channel with optics for 2nd generation Equaline. Body: silver powder coated aluminium, suitable for surface, suspended and plasterboard installation. For single and continuous installation. Continuous run with visible joints between optic pieces. Optics: Luminance reducing optic (LRO) with $UGR < 19$ made of PMMA. Batten, end cap set and installation accessories to be ordered separately. Luminaire wired with halogen free leads.

Equaline consists of a channel, LED-batten, cover and accessories, which have to be configured and ordered separately. This product is one part of the complete configuration.

Dimensions: 1500 x 72 x 88 mm
 Luminaire input power: 26.7 W
 Luminaire luminous flux: 2320 lm
 Luminaire efficacy: 87 lm/W
 Weight: 3.2 kg

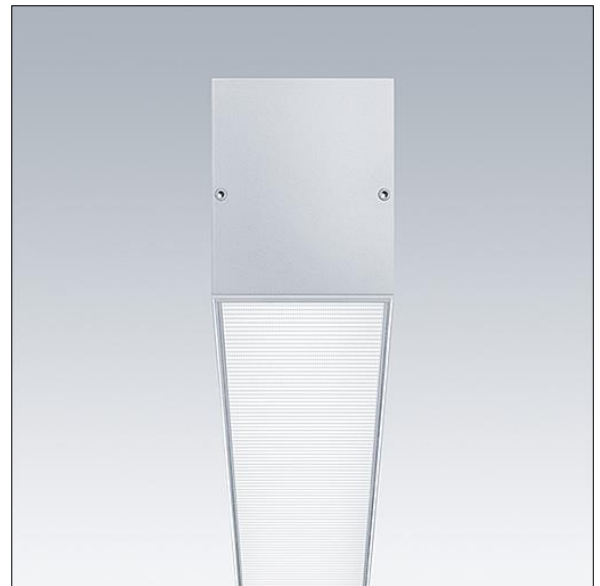

TLG_EQUL_F_C_MPO_Channel_SR.jpg

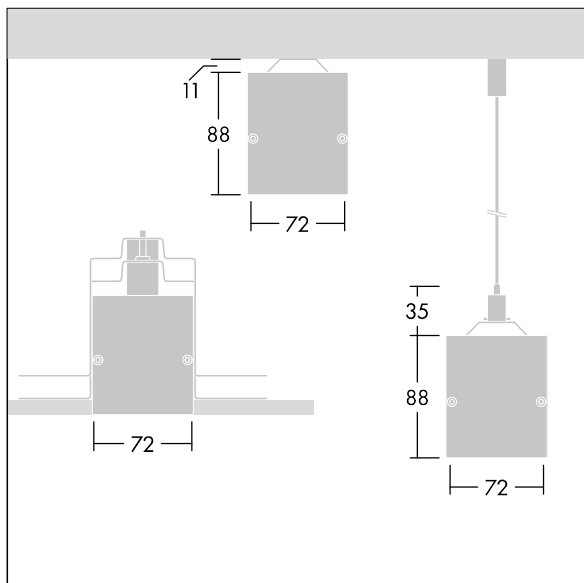

TLG_EQUL_M_surface_suspended_plasterboard.wmf

Equaline

96632001 EQL C L1500 LRO SRE

THORN