

# Equaline

96632032 EQL C L1750 LRO WH

THORN

## Equaline


Equaline frameless channel with optics for 2nd generation Equaline. Body: powder coated aluminium, suitable for surface, suspended and plasterboard installation. For single and continuous installation. Continuous run with visible joints between optic pieces. Optics: Luminance reducing optic (LRO) with  $UGR < 19$  made of PMMA. Batten, end cap set and installation accessories to be ordered separately. Luminaire wired with halogen free leads.

Equaline consists of a channel, LED-batten, cover and accessories, which have to be configured and ordered separately. This product is one part of the complete configuration.

Dimensions: 1750 x 72 x 88 mm  
Luminaire input power: 30.6 W  
Luminaire luminous flux: 2960 lm  
Luminaire efficacy: 97 lm/W  
Weight: 3.7 kg



TLG\_EQUL\_F\_C\_MPO\_Channel\_WH.jpg

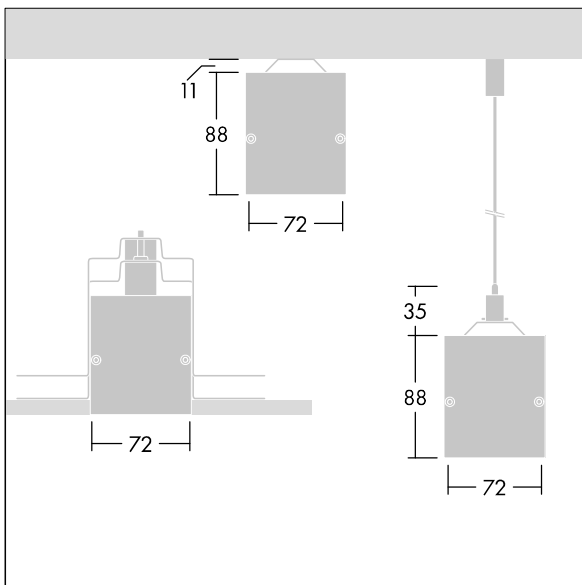

TLG\_EQUL\_M\_surface\_suspended\_plasterboard.wmf

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at  $\pm 10\%$ . Unless stated otherwise, the values apply to an ambient temperature of  $25^{\circ}\text{C}$ .

Thorn Lighting is constantly developing and improving its products. The right is reserved to change specifications without prior notification or public announcement.  
© Thorn Lighting

**Equaline**

**96632032 EQL C L1750 LRO WH**

**THORN**