

Raze Bollard

96632090 RAW 1L20-830 WPC HF CL1 6K ANT

Raze Bollard


A wall mounted LED luminaire, incorporating Thorn's Flat beam® technology. 1 LED driven at 200mA. Integral LED driver included. Class I electrical, IP66, IK10. Housing: die-cast aluminium (EN44300, compatible with seaside installation), powder coated, textured anthracite (close to RAL7043). Bowl: UV stabilised polycarbonate, semi-frosted. Fasteners: stainless steel. Complete with 3000K LED.

6kV surge protection as standard.

Dimensions: 176 x 220 x 145 mm
 Luminaire input power: 9 W
 Luminaire luminous flux: 403 lm
 Luminaire efficacy: 45 lm/W
 Weight: 2.77 kg



TLG_RAZB_F_HEAD_PDB.jpg

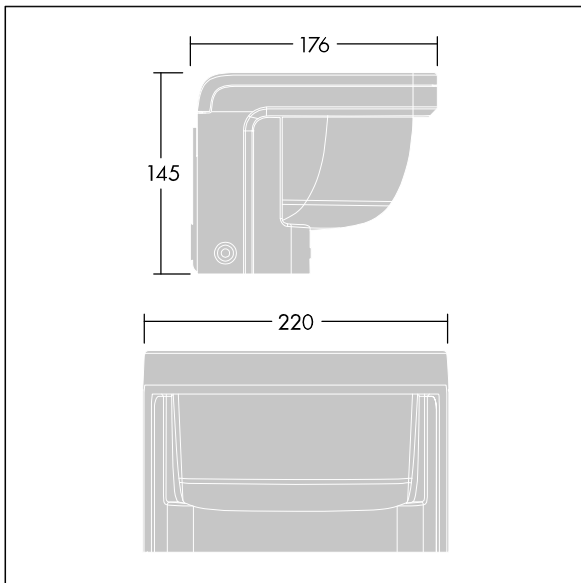

TLG_RAZB_M_HEAD.wmf

This product contains a light source of energy efficiency class E.

Raze Bollard

96632090 RAW 1L20-830 WPC HF CL1 6K ANT

THORN