

## Omega Pro 2

**92914016 OP2 3800-840 CKIT+ HX E3 3X12**


+ ESC: escape route emergency optic

### Omega Pro 2


A recessed/surface/suspended, edge-lit LED luminaire. LED driver, DALI-2 dimmable with 3 hour, manual test, emergency lighting circuit. Class II electrical, IP40\_IP20, Impact strength: IK03. Body: sheet steel, finished white (close to RAL9016). Diffuser: UV-stabilised polycarbonate hexagonal comfort optic with central control pod hole. Electrical connection via 7 pole piano key terminals, loop-in/loop-out possible. Complete with 4000K LED, Colour Rendering Index min.: 80

Dimensions: 1197 x 297 x 59 mm  
 Luminaire input power: 27.4 W  
 Luminaire luminous flux: 3800 lm  
 Luminaire efficacy: 139 lm/W  
 Weight: 6.09 kg

Equipped with:  
 Optics transparent polycarbonate lens for escape emergency lighting. Set of three lenses supplied with the luminaire.

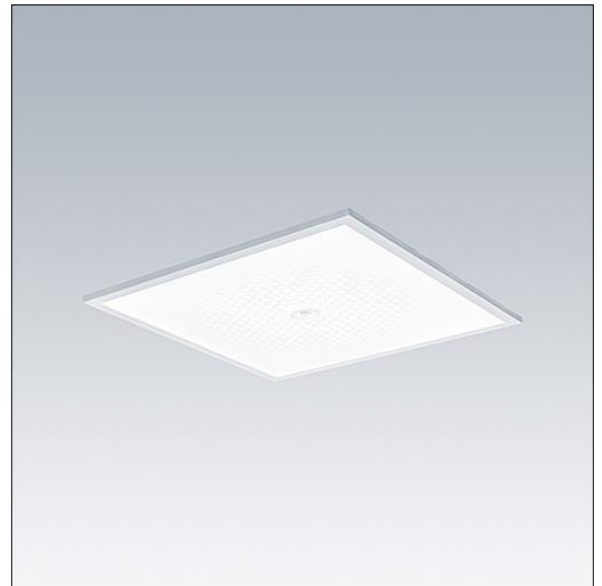

TLG\_OMP2\_F\_QHPIR\_PDB.jpg

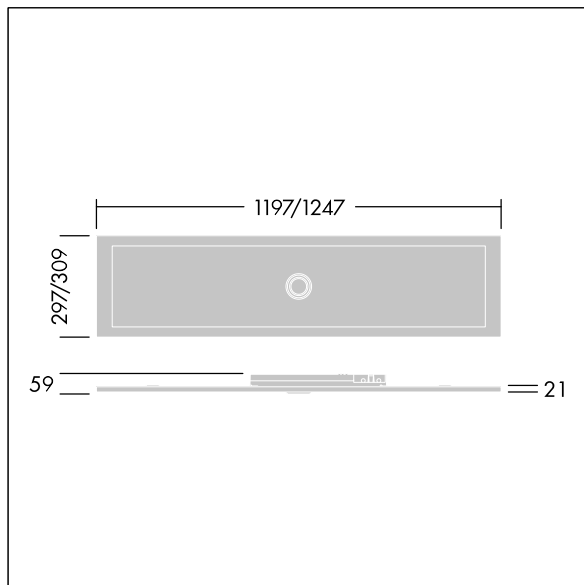

TLG\_OMP2\_M\_LKIT.wmf

All values marked with an \* are rated values. Thorn uses tried and tested components from leading suppliers, however there may be isolated instances of technology-related failures of individual LEDs during the rated product lifetime. International standards set the tolerance in initial flux and connected load at  $\pm 10\%$ . Unless stated otherwise, the values apply to an ambient temperature of 25°C.