


Contus


An energy-efficient, linear continuous-row luminaire with 64 highly efficient mid-power LEDs per module with very wide beam light distribution. Fixed output LED driver. Body: sheet steel coated with polyester lacquer finish, white. Class I electrical, IP20, IK07. All-in-one solution: lighting batten, lamp and reflector are combined in one product to produce a 100 % continuous LED light line without gaps or interruptions. The luminaire design fully matches the trunking to create a seamless system. Colour rendering Ra > 80, colour temperature 4000 K.

Please obtain advice from your local representative if you are planning to use the luminaire in environments containing chemical pollutants.

Dimensions: 1498 x 60 x 71 mm
 Luminaire input power: 52.3 W
 Luminaire luminous flux: 7790 lm
 Luminaire efficacy: 149 lm/W
 Weight: 2.14 kg

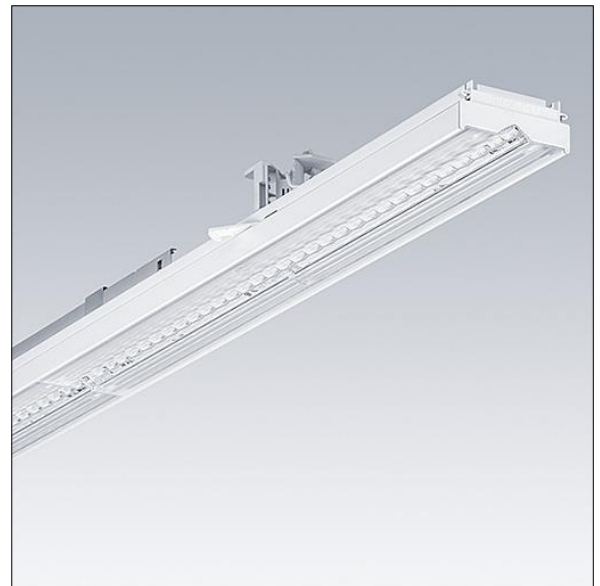

TLG_CONT_F_BATTEN.jpg

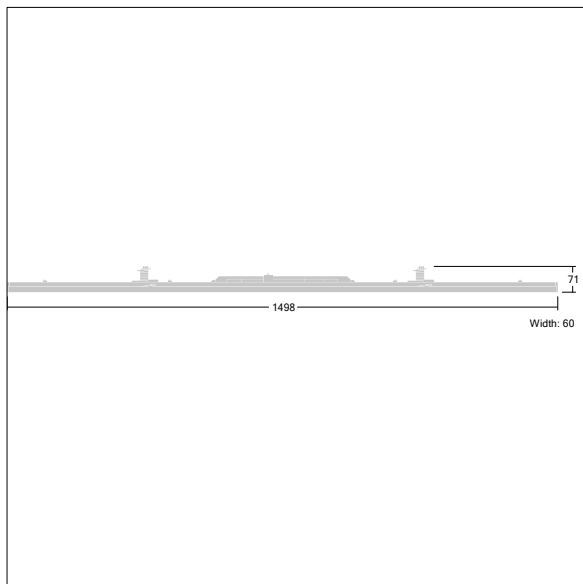

TL_CONTUS_M_L1500.wmf

This product contains a light source of energy efficiency class D.

Contus

96635823 CONTUS 8000-840 L1500 VWB HF WH

THORN