

Areaflood Pro 2

96635874 AFP2 S 36L70-740 A4 CL2 GY

Areaflood Pro 2


A compact, lightweight, general purpose LED area floodlight. With small body. LED converter driving 36 LEDs at 700mA with Asymmetrical 40° light distribution. IP66, IK08, Class II electrical. Body: die-cast aluminium (EN AC-44300), Light grey 150 sanded textured (close to RAL9006).. Enclosure: 4mm thick toughened glass. Reversible mounting stirrup supplied, optional spigot adaptors available separately for post top mounting. Complete with 4000K LED.

Integrated 6kV surge protection included as standard, with higher 10kV protection when selected (designated by 'SP' in the description).

Dimensions: 429 x 349 x 99 mm
 Luminaire input power: 76 W
 Luminaire luminous flux: 12161 lm
 Luminaire efficacy: 160 lm/W
 weight: 7.07 kg
 Scx: 0.052 m²



TLG_AFP2_F_S_1.jpg

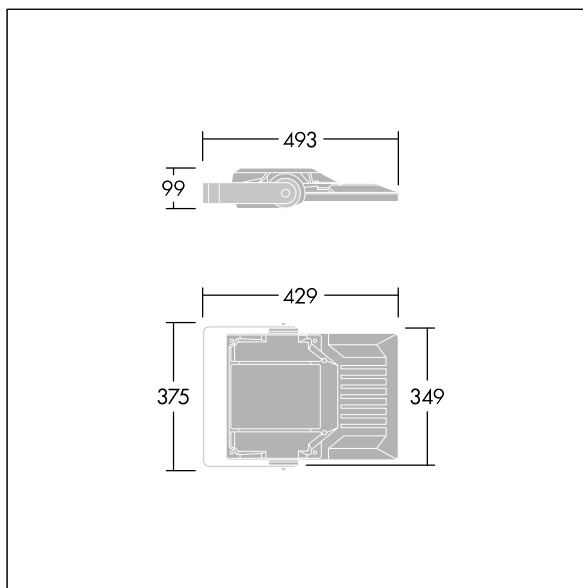

TLG_AFP2_M_S.wmf

This product contains a light source of energy efficiency class E.

Areaflood Pro 2

96635874 AFP2 S 36L70-740 A4 CL2 GY

THORN