


Omega Pro 2

Connect to the future

- Connectivity-ready luminaire featuring the pluggable, interoperable C-KIT for toolless mechanical and electrical connection of sensors, wireless nodes or emergency functionality
- The right light for any task is provided through 3 dedicated optics: opal (OP) / balance, prismatic (MPT) / performance and hexagonal (HX) / comfort
- Tune your light and shape your office or school towards a zone of relaxation, focus or communication with the new variable colour temperature feature (VCT)
- Omega Pro 2 can be installed into visible & hidden T-bar ceilings, plasterboard ceilings and can be surface mounted or suspended too



Photographs, line drawings and photometric data are representative only. For specific product detail please select an individual product.

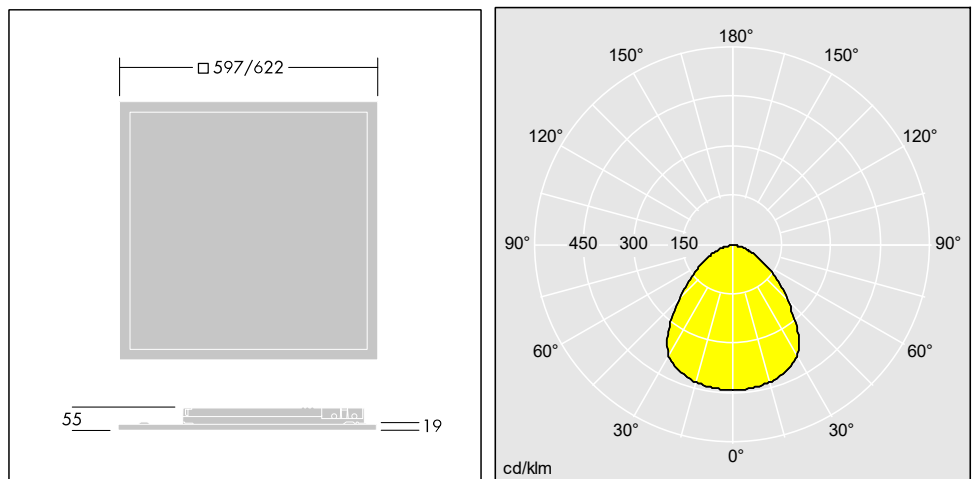

92916188

Material/Finish

Frame: mild sheet steel, white (RAL9016)

Back: mild sheet steel, galvanised

Diffuser: OP = UV-stabilized PMMA, MPT / HX = UV-stabilized PC

CKIT / CKIT+: UV-stabilized Polycarbonate

Installation/Mounting

Lay-in: Omega Pro LED is suitable for lay-in installation into 15mm or 24mm exposed T grid ceilings.

Concealed ceilings: For installation into concealed ceilings, accessories are available and need to be ordered separately.

Plasterboard ceilings: For installation into plasterboard ceilings, accessories are available and need to be ordered separately.

Surface mounting: collar type - fixed to the ceiling with 4 screws via keyhole slots, product to be laid in.

Suspended mounting: suspended via adjustable wire suspension (1500mm), 4 fixing points to the ceiling.

Omega Pro 2

Ordering Guide

Description	ILCOS Code	Socket	Wt (kg)	SAP Code
Omega Pro 2 CKITplus, MPT optic				
OP2 3000-840 CKIT+ MPT Q600	LED		5,35	96633085
OP2 3800-840 CKIT+ MPT Q600	LED		5,35	96633086
OP2 4400-840 CKIT+ MPT Q600	LED		5,35	96633087
OP2 3000-840 CKIT+ MPT 3X12	LED		5,58	96633091
OP2 3800-840 CKIT+ MPT 3X12	LED		5,58	96633092
OP2 4400-840 CKIT+ MPT 3X12	LED		5,58	96633165
OP2 4400-840 CKIT+ MPT BC PIR Q600	LED		5,52	92913361
OP2 3800 840 CKIT+ MPT BC PIR Q600	LED		5,52	92913362
OP2 3800-927-65 CKIT+ MPT BC PIR Q600	LED		5,52	92913437
OP2 4400-840 CKIT+ MPT MWS Q600	LED		5,45	92914505
OP2 4400-840 CKIT+ MPT HFSX Q600	LED		5,44	92914506
OP2 4400-927-65 CKIT+ MPT BC PIR Q600	LED		5,52	92915964
OP2 4400-927-65 CKIT+ MPT BC Q600	LED		5,44	92915965
OP2 4400-840 CKIT+ MPT ECD Q600	LED		5,4	92938016
Omega Pro 2 CKITplus, HX optic				
OP2 3800-840 CKIT+ HX Q600	LED		5,35	92913222
OP2 3800-927-65 CKIT+ HX BC PIR Q600	LED		5,52	92913229
OP2 3800-840 CKIT+ HX 3X12	LED		5,58	92914008
OP2 3800-840 CKIT+ HX E3 3X12	LED		6,09	92914016
OP2 4400-927-65 CKIT+ HX BC Q600	LED		5,44	92915961
OP2 4400-927-65 CKIT+ HX BC PIR Q600	LED		5,52	92915966
Omega Pro 2 CKIT, MPT optic				
OP2 3800-840 CKIT MPT BC Q600 MRG	LED		5,455	92913233
OP2 4400-927-65 CKIT MPT BC Q600	LED		5,44	92915969
Omega Pro 2 CKIT, HX optic				
OP2 4400-830 CKIT HX Q600	LED		5,35	92913996
OP2 3800-840 CKIT HX Q600	LED		5,4	92916880
OP2 3000-840 CKIT HX Q600	LED		5,4	92919333
Omega Pro 2, MPT optic				
OP2 3000-840 MPT HFIX Q600	LED		5,05	92913227
OP2 3000-840 MPT HF Q600	LED		5,05	92913228
OP2 3800-840 MPT HF Q600	LED		5,05	92913230
OP2 3800-840 MPT HFIX Q600	LED		5,05	92913231
OP2 4400-840 MPT HFIX Q600	LED		5,05	92913441
OP2 4400-840 MPT HF E3 Q600	LED		5,56	92913443
OP2 3800-840 MPT HF E3 Q600	LED		5,56	92913444
OP2 3000-840 MPT HF E3 Q600	LED		5,56	92913445
OP2 3000-840 MPT HF E3D Q600	LED		5,57	92913446
OP2 3800-840 MPT HF E3D Q600	LED		5,57	92913447
OP2 3000-840 MPT HFIX E3D Q600	LED		5,57	92913448
OP2 3800-840 MPT HFIX E3D Q600	LED		5,57	92913449
OP2 4400-840 MPT HF E3D Q600	LED		5,57	92913450
OP2 4400-840 MPT HFIX E3D Q600	LED		5,57	92913451

Omega Pro 2

Description	ILCOS Code	Socket	Wt (kg)	SAP Code
OP2 3800-840 MPT HFIX 3X12	LED		5,28	92914006
OP2 4400-840 MPT HFIX E3D 3X12	LED		5,8	92914014
OP2 3800-840 MPT HFIX Q600 MRG	LED		5,065	92915035
OP2 4400-840 MPT HF Q600	LED		5,05	92915526
OP2 4400-840 MPT HFIX 3X12	LED		5,28	92916126
OP2 3000-840 MPT HFIX E3 Q600	LED		5,56	92916274
OP2 4400-840 MPT HFIX E3 Q600	LED		5,56	92916275
OP2 3800-840 MPT HFIX E3 Q600	LED		5,56	92916276
OP2 3000-840 MPT HF 3X12	LED		5,28	92916303
OP2 3000-840 MPT HF E3 3X12	LED		5,79	92916304
OP2 3000-840 MPT HFIX E3 3X12	LED		5,79	92916305
OP2 3000-840 MPT HF E3D 3X12	LED		5,8	92916306
OP2 3000-840 MPT HFIX E3D 3X12	LED		5,8	92916307
OP2 3000-840 MPT HFIX 3X12	LED		5,28	92916317
OP2 3800-840 MPT HFIX E3D 3X12	LED		5,8	92916319
OP2 3800-840 MPT HF E3D 3X12	LED		5,8	92916320
OP2 3800-840 MPT HF E3 3X12	LED		5,79	92916321
OP2 3800-840 MPT HFIX E3 3X12	LED		5,79	92916322
OP2 3800-840 MPT HF 3X12	LED		5,28	92916323
OP2 4400-840 MPT HF 3X12	LED		5,28	92916324
OP2 4400-840 MPT HFIX E3 3X12	LED		5,79	92916325
OP2 4400-840 MPT HF E3 3X12	LED		5,79	92916326
OP2 4400-840 MPT HF E3D 3X12	LED		5,8	92916327
OP2 3800-927-65 MPT HFIX 3X12	LED		5,28	92920344
OP2 3800-927-65 MPT HFIX Q600	LED		5,05	92920345
OP2 4400-927-65 MPT HFIX 3X12	LED		5,28	92920346
OP2 4400-927-65 MPT HFIX Q600	LED		5,1	92920347
Omega Pro 2, HX optic				
OP2 3800-840 HX HF 3X12	LED		5,28	92913223
OP2 3800-840 HX HFIX 3X12	LED		5,28	92913224
OP2 3800-840 HX HF Q600	LED		5,05	92913225
OP2 3800-840 HX HFIX Q600	LED		5,05	92913226
OP2 3800-840 HX HFIX E3D Q600	LED		5,57	92914001
Omega Pro 2, OP optic				
OP2 3800-840 OP HFIX Q600	LED		5,05	92913440
OP2 3800-840 OP HF Q600	LED		5,05	92913453
OP2 3000-840 OP HFIX E3 Q600	LED		5,56	92913455
OP2 3000-840 OP HF E3 Q600	LED		5,56	92913456
OP2 3000-840 OP HFIX Q600	LED		5,05	92913457
OP2 3000-840 OP HF E3D Q600	LED		5,57	92913458
OP2 3000-840 OP HFIX E3D Q600	LED		5,57	92913459
OP2 3000-840 OP HF Q600	LED		5,05	92913460
OP2 4400-840 OP HF Q600	LED		5,05	92913461
OP2 4400-840 OP HF E3 Q600	LED		5,56	92913462
OP2 4400-840 OP HF E3D Q600	LED		5,57	92913463
OP2 4400-840 OP HFIX E3D Q600	LED		5,57	92913464

Omega Pro 2

Description	ILCOS Code	Socket	Wt (kg)	SAP Code
OP2 4400-840 OP HFIX E3 Q600	LED		5,56	92913465
OP2 3800-840 OP HFIX E3 Q600	LED		5,56	92913466
OP2 4400-840 OP HFIX Q600	LED		5,05	92913467
OP2 3800-840 OP HF E3 Q600	LED		5,56	92913468
OP2 3800-840 OP HFIX E3D Q600	LED		5,57	92913469
OP2 3800-840 OP HF E3D Q600	LED		5,57	92913470
Omega Pro 2 CKIT interchangeable modules				
OP2 CKIT BC			0,37	96633180
OP2 CKIT BLANK			0,28	96633178
Omega Pro 2 CKITplus interchangeable modules				
OP2 CKIT+ BLANK			0,3	96633181
OP2 CKIT+ MWS			0,4	96633182
OP2 CKIT+ PIR DALI-M-sensor G3			0,32	96633184
OP2 CKIT+ BC PIR			0,39	96633186
OP2 CKIT+ E3			0,51	96633187
OP2 CKIT+ E3D			0,52	96633188
OP2 CKIT+ BC E3			1,5	96633263
OP2 CKIT+ BC E3D			0,8	96633264
OP2 CKIT+ HFSX			0,78	96633268
OP2 CKIT+ BC			0,8	96633270
OP2 CKIT+ SENS			0,41	96634040
Omega Pro 2 mounting accessories				
OP2 SURFACE MTG KIT Q600			2,21	96633189
OP2 SURFACE MTG KIT 3X12			2,83	96633191
OP2 PLASTERBOARD MTG KIT Q600			1,7	96633193
OP2 PLASTERBOARD MTG KIT 3X12			2,21	96633195
OP2 SUSPENSION KIT 1500 MSW			0,3	96633197
OP2 HIDDEN CEILING KIT CLICK IN 6x6			0,22	96633198
OP2 SAFETY WIRE KIT MRG			0,015	96633199
OP2 CONCEALED CEILING MTG KIT PULL UP			0,38	96633271
OP2 HIDDEN CEILING KIT CLICK IN 3x12			0,43	96633300